

SH-1600L

Top heat roll laminator



Lamichina Co. Ltd.

www.lamichina.com



Top Heat Roll Laminator

With full independent temperature and speed control, the SH-1600L is ideal for both new and experienced image finishers who require a highly capable laminator but have no need for hot encapsulation.

Features


- ◎ Solid structure, multi-functions
- ◎ 140mm large silicone rollers
- ◎ Top roller heat up to 120 °C
- ◎ Infrared sensor for precise temperature control
- ◎ Fold away front table
- ◎ Swing out supply shafts for easy loading
- ◎ Self-checking photo cells for safety protection
- ◎ Auto grip shafts for user friendly
- ◎ Laminated graphic rewind




Control Panel

Technical specifications

- ◎ Max. laminating width: 1600mm
- ◎ Max. laminating thickness: 50mm
- ◎ Max. laminating speed: 6m/min
- ◎ Max. working temperature: 120 °C
- ◎ Top roller lifting: Single hand wheel lift up
- ◎ Heating method: Infrared heating
- ◎ Power requirement: AC 220-240V; 50/60Hz
- ◎ Power consumption: 2700W
- ◎ Machine Dimensions (LxWxH): 2100x600x1210mm
- ◎ Gross Weight: 325 kg

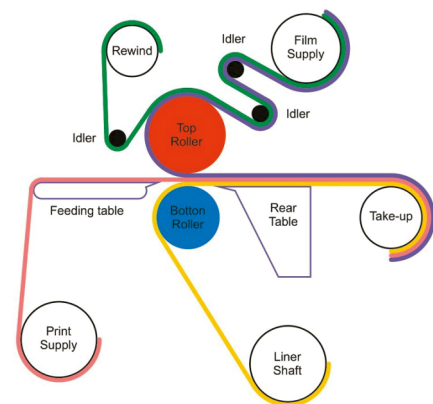

Threading Diagram

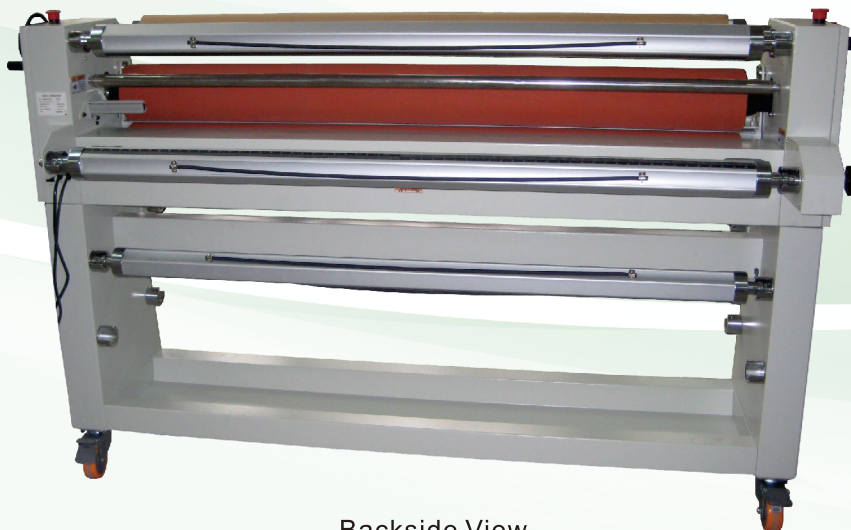

Backside View